



# INSTRUCTION

## ADDING INDIVIDUAL CONTENT



*Ergoline*

## 1. COPY THE DESIRED FILE(S) TO AN USB STICK.

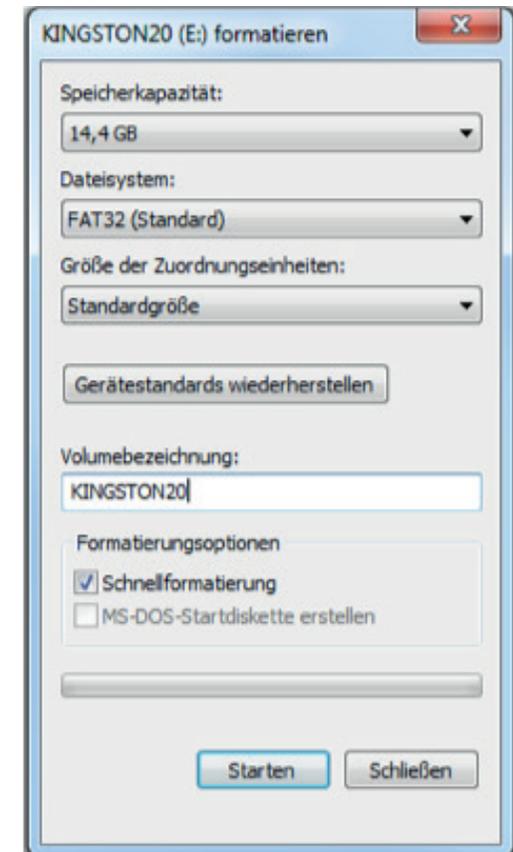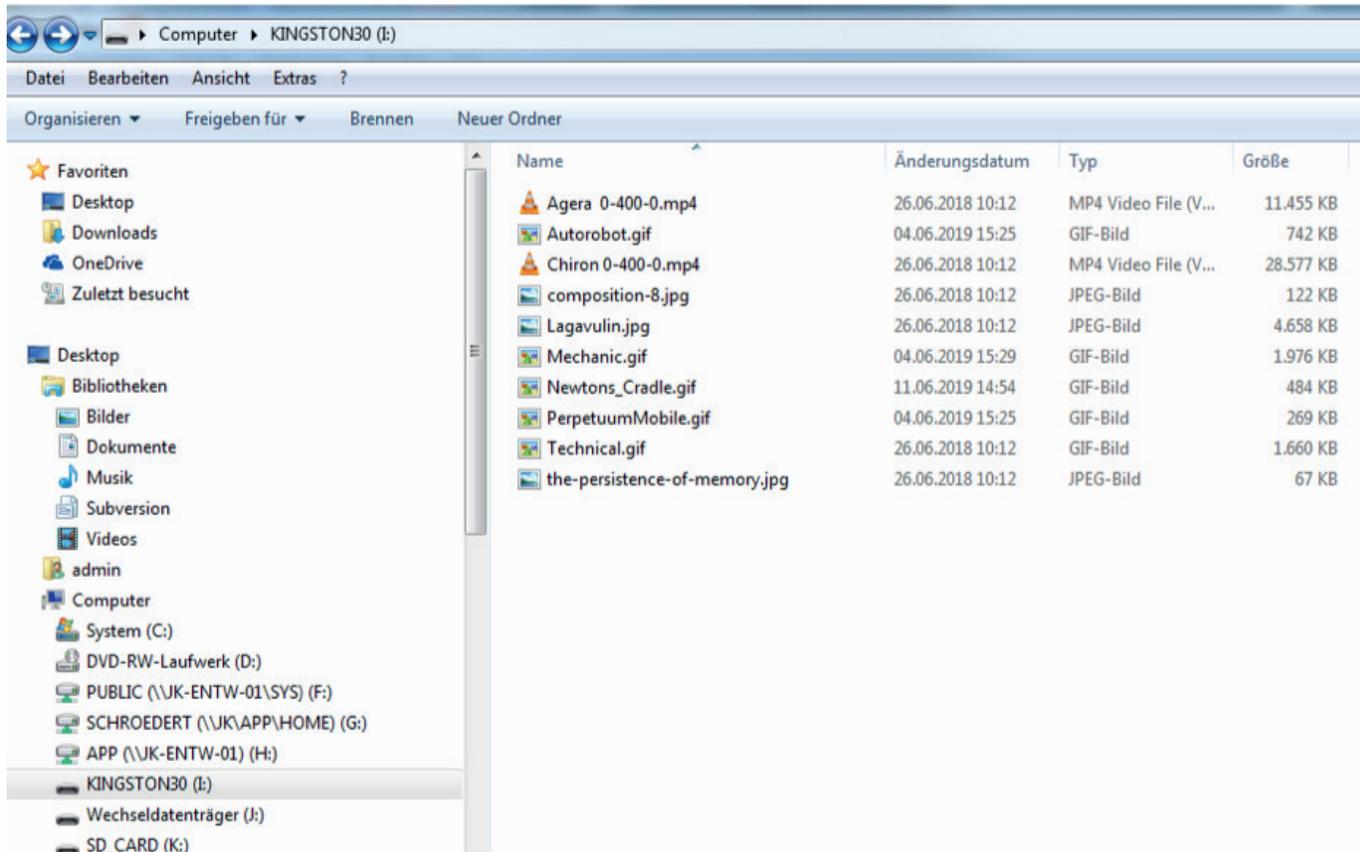


**IMPORTANT: THE FILE(S) MUST BE STORED IN THE ROOT DIRECTORY OF THE USB STICK, NOT IN SUBFOLDERS.**

- No further files should be stored on the USB stick
- Possible file formats: JPG, PNG and GIF (images) and MP4 (videos)
- Please note the 16:10 format so that pictures/videos are shown correctly in the display
- If necessary, the USB stick must be set to „FAT 32“

*Ergoline*


2. OPEN THE LOWER PART OF THE SOLARIUM.

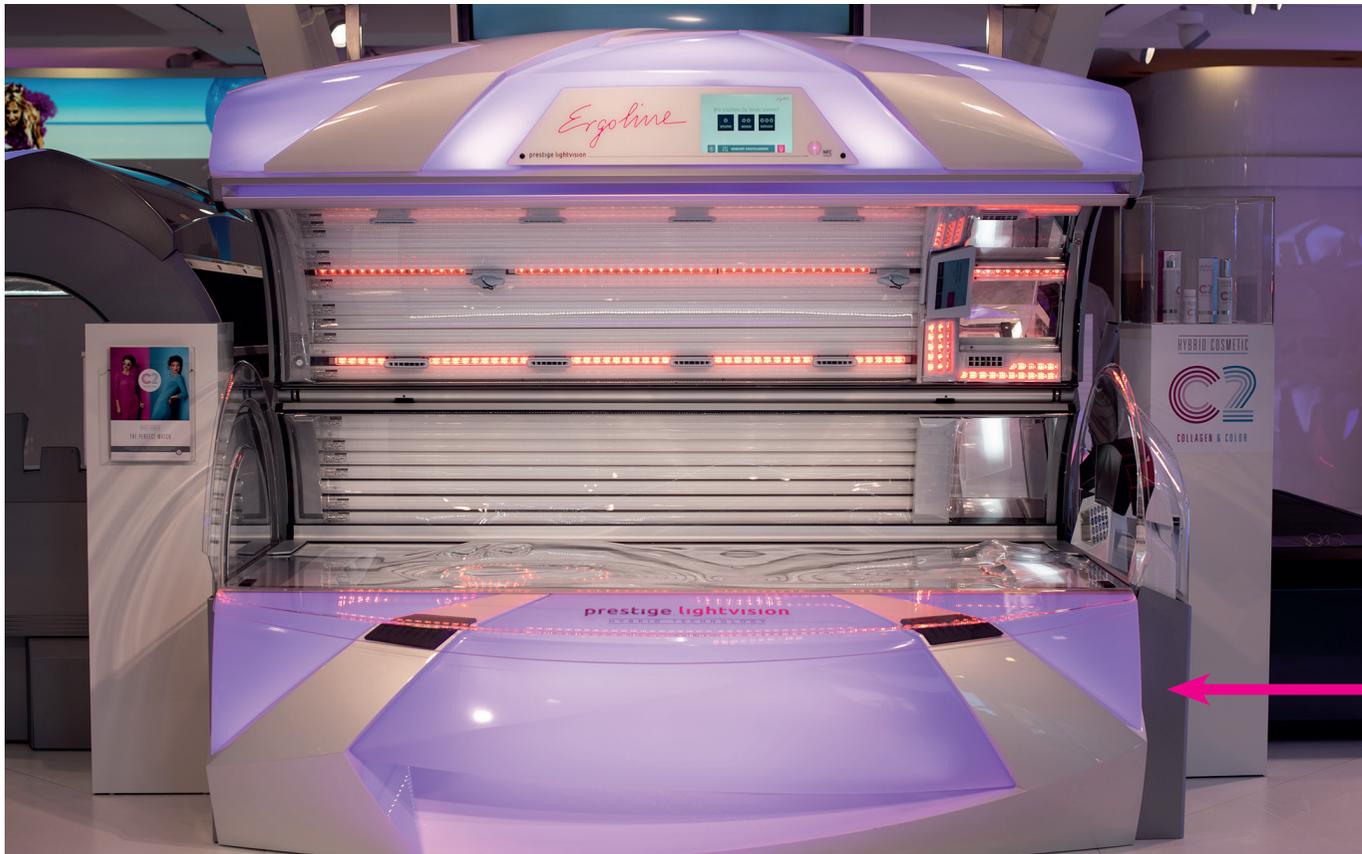

**PULL THE HANDLE OUTWARDS TO OPEN THE TUB!**

*Ergoline*

**2.1** THE ERROR MESSAGE „E036“ CAN BE IGNORED.

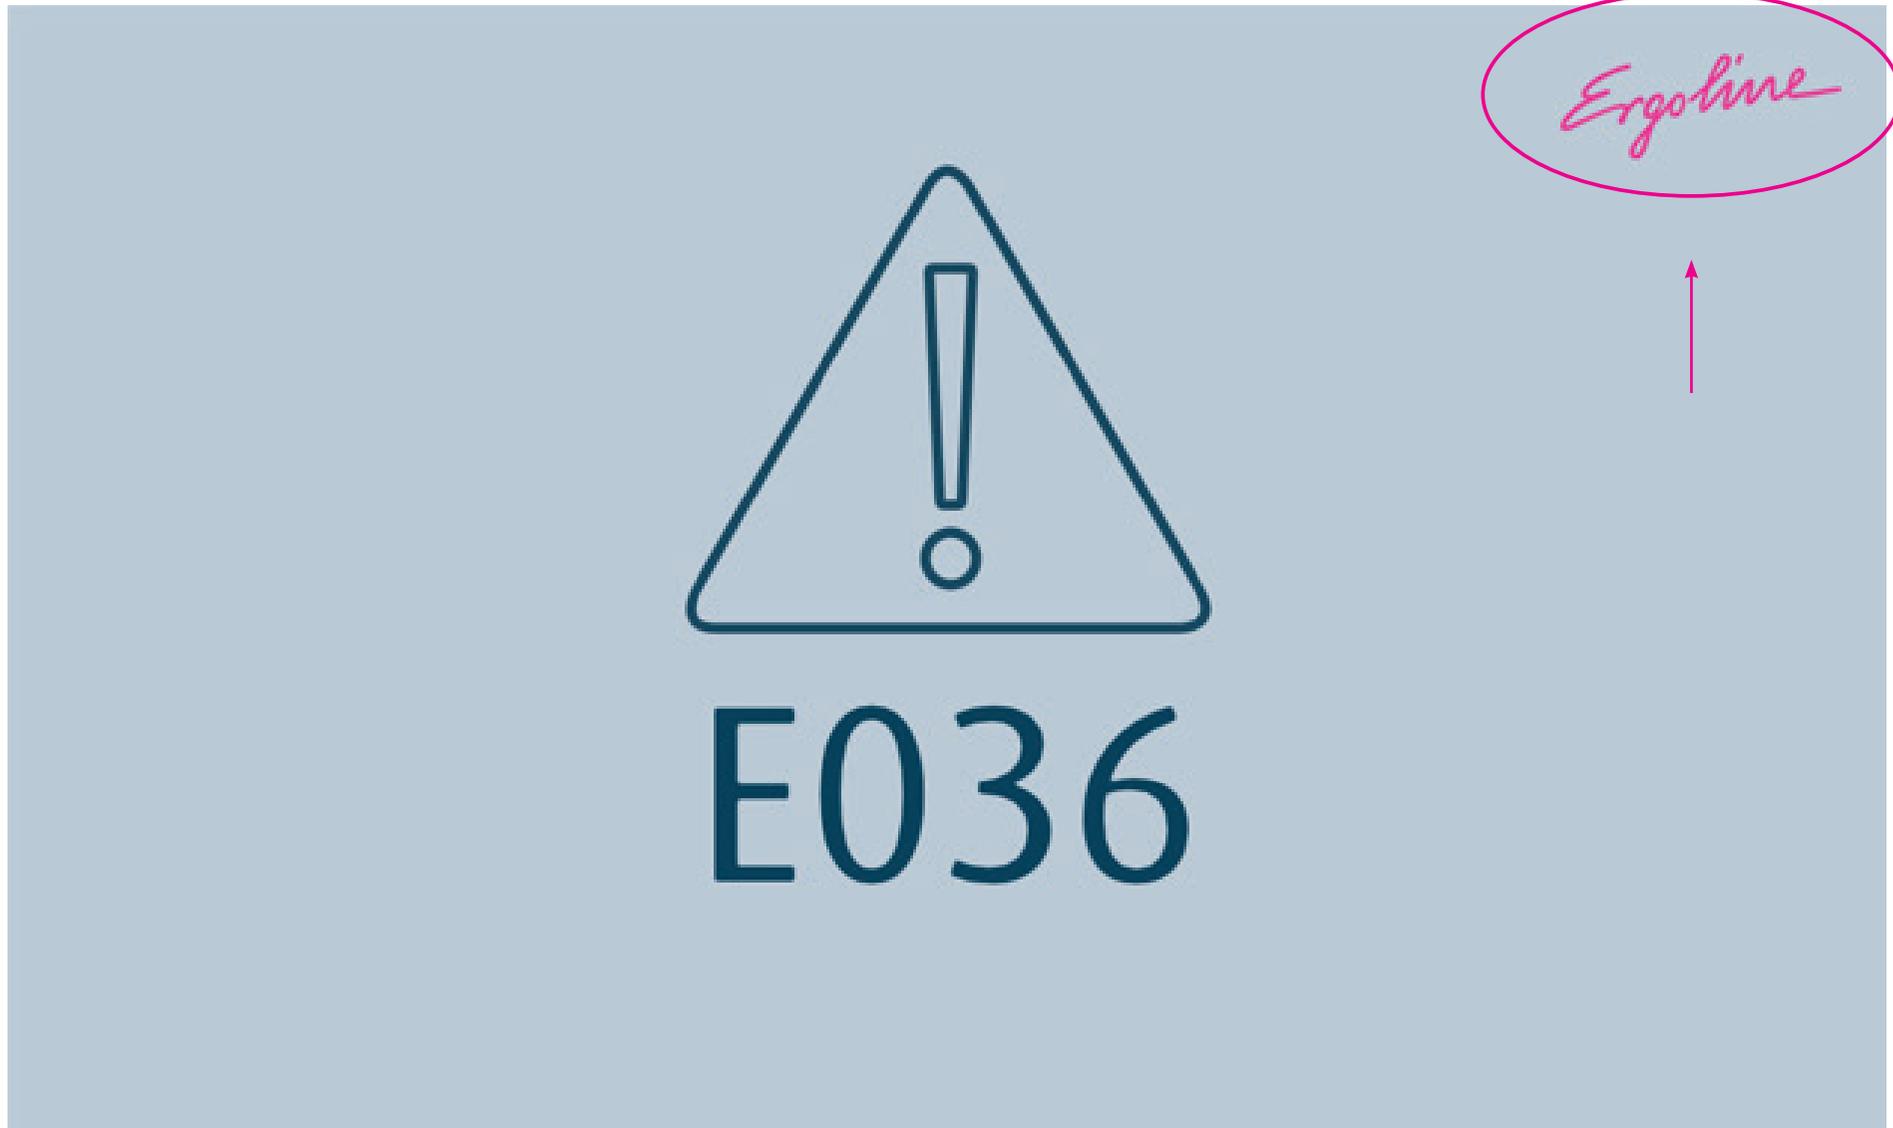

*Ergoline*

3. OPEN THE PROFESSIONAL SETUP MANAGER BY PRESSING THE ERGOLINE ICON AND THEN START IT WITH THE CORRECT ACCESS CODE.



The screenshot displays the 'PROFESSIONAL SET-UP MANAGER' interface. At the top left, there is a back arrow and the text 'Home'. In the center, a gear icon is followed by the title 'PROFESSIONAL SET-UP MANAGER'. At the top right, the 'Ergoline' logo is visible. Below the title bar, the text 'Mastercode eingeben' is displayed. A numeric keypad is shown on the left, with buttons for digits 1-9, 0, and a backspace key (represented by a left-pointing arrow and an 'X'). To the right of the keypad, the text 'Mastercode eingeben' is repeated above a display area showing the code '1000'. To the right of the code display is a large pink square containing a white checkmark, indicating successful entry.

3.1 THIS PICTURE WILL APPEAR.



4. SELECT THE DIRECTORY "VIDEOS & PICTURES".

The screenshot shows the 'PROFESSIONAL SET-UP MANAGER' interface. The top bar includes a back arrow and 'Home' on the left, a gear icon and 'PROFESSIONAL SET-UP MANAGER' in the center, and the 'Ergoline' logo on the right. A left-hand menu lists various settings categories, with 'Videos & Bilder' highlighted in pink. The main content area displays two rows of settings for 'Welcome Screen' and 'Lüfternachlauf Screen'. Each row contains a toggle switch for 'Loop' and 'Sound', both currently turned off, followed by a right-pointing chevron arrow.

Screen Type	Loop	Sound	Action
Welcome Screen	<input type="checkbox"/>	<input type="checkbox"/>	>
Lüfternachlauf Screen	<input type="checkbox"/>	<input type="checkbox"/>	>

5. INSERT THE USB STICK INTO THE USB PORT, WHICH **NOT** MARKED RED.



*Ergoline*

6. THE FILE(S) ARE NOW AUTOMATICALLY TRANSFERRED TO THE DEVICE.  
REMOVE THE STICK, WHEN READY.



7. CLOSE THE DEVICE AND RESET THE ERROR MESSAGE IN THE **INTERNAL DISPLAY** WITH „RESET“.



8. START THE PROFESSIONAL SET UP MANAGER BY PUSHING THE ERGOLINE SYMBOL AGAIN.

*Ergoline*

Wie möchten Sie heute sonnen?



SENSITIVE



MEDIUM



INTENSIVE

Activating Light LED




KOMFORT EINSTELLUNGEN



*Ergoline*

9. THE NEW FILES ARE DISPLAYED IN THE PROFESSIONAL SET-UP MANAGER UNDER „VIDEOS & PICTURES“ - „MY PICTURE/VIDEO“ (WELCOME SCENE AND FAN AFTERRUN SCREEN). SELECT THE DESIRED FILE IN THE WELCOME SCENE OR FAN SCREEN AND EXIT THE PROFESSIONAL SET-UP MANAGER WITH „BACK“ AND „HOME“.

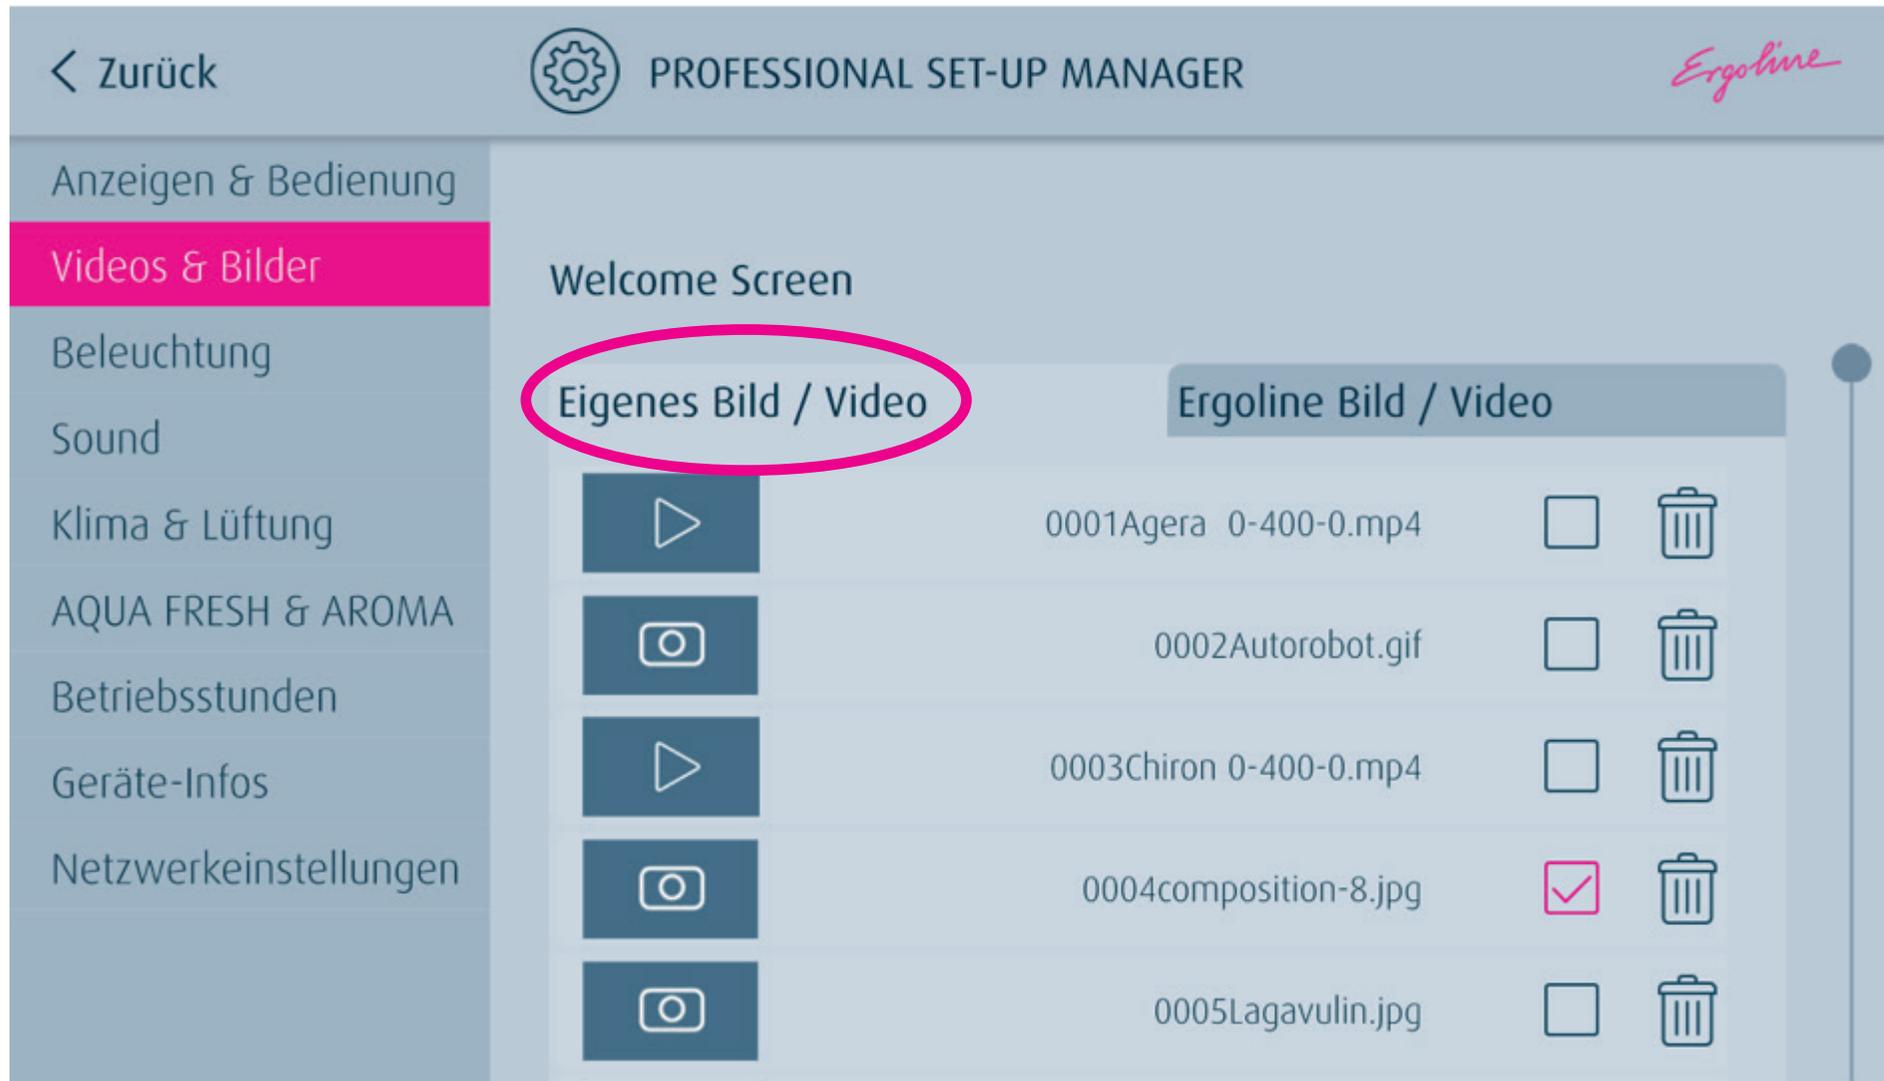

THE NEW IMAGE/VIDEO IS AUTOMATICALLY DISPLAYED IN THE WELCOME SCREEN AFTER A FEW SECONDS. THE PICTURE/VIDEO CHANGES REGULARLY WITH THE STANDARD DISPLAY.

*Ergoline*

Wie möchten Sie heute sonnen?



SENSITIVE



MEDIUM



INTENSIVE

Activating Light LED



KOMFORT EINSTELLUNGEN



*Ergoline*